


Varžtai, tipas WSPC
kronšteinų ir kampų RX-K-System ir RX-Solid tvirtinimui prie PVC profilio



WSPC Flange head self-drilling screw, PH

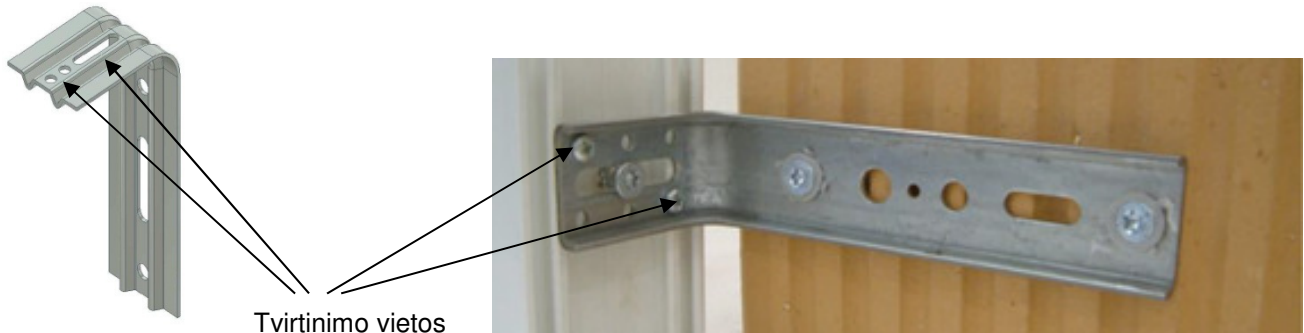

PN-EN 14566
+A1:2010



Description

Flange head self-drilling screw for making lap joints in steel sheets up to 2mm thick.
Material: zinc plated carbon steel.

Protective coating

White
zinc

Features and advantages



Flange head with PH drive

Flange head ensures tight fastening of the installed element. Commonly used PH drive also makes installation easier.




Correct thread pitch and length

The right pitch ensures correct installation of members.



Sharp self-drilling point

Special self-drilling point ensures easier and faster screw installation in steel.



	Code	d _w x L _w [mm]	D [mm]	k [mm]	PH	Pcs
ø4,2	WSPC-42013	4,2 x 13	11,5	2	PH 2	1000
	WSPC-42016	4,2 x 16	11,5	2	PH 2	1000
	WSPC-42019	4,2 x 19	11,5	2	PH 2	1000
	WSPC-42025	4,2 x 25	11,5	2	PH 2	500
	WSPC-42032	4,2 x 32	11,5	2	PH 2	500
	WSPC-42045	4,2 x 45	11,5	2	PH 2	300
	WSPC-42055	4,2 x 55	11,5	2	PH 2	300